



ROLLAND
CENTURIES OF SECURITY



FL3020



Protection. 1/2" thick A36 solid steel plate door. High tensile steel body and jamb construction to maximize protection against pry or sledgehammer attack. 3-way locking mechanism consisting of five 1" diameter chrome steel locking bolts.

Auto-Lock Feature. Bolts extend automatically when safe is closed, so a closed safe is a locked safe.

Fish-Resistant. An anti-fish baffle deters theft where employees or burglars attempt to "fish" the safes contents through the deposit drawer.

Storage. Convenient 4-compartment recessed door mounted coin rack. Safe holds up to 6 cash trays. The large package capacity holds up to 4" x 9" x 11 1/2".

UL Rated Lock. UL Listed Group II lock




Attack Resistant. Emergency bolts fire when the safe detects an attack.

Protected Locks. Locks and emergency locks protected by a large carburized hard plate.

FL3020	
Exterior H x W x D (in)	39.75" H x 20" W x 20" D
Interior H x W x D (in)	29.75 " H x 19.75" W x 17" D
Weight	305 Lbs.
Shelves	2
Capacity	5.78 cubic feet

All specifications are approximate and subject to change without notice.

Diagrams and Specifications

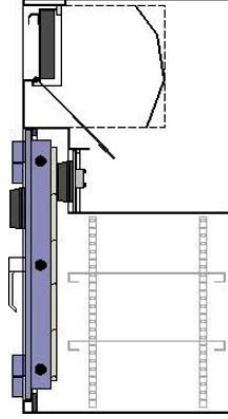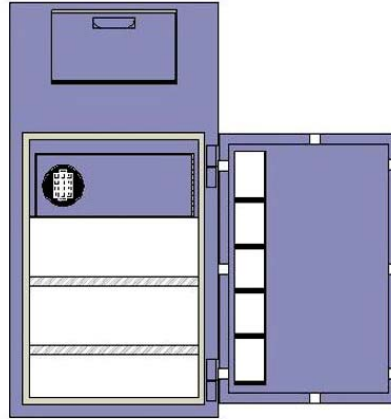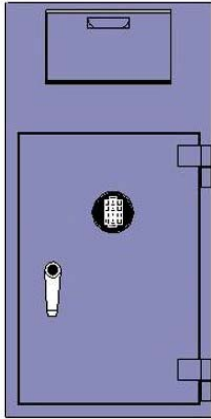

FL3020	
Exterior H x W x D (in)	39.75" H x 20" W x 20" D
Interior H x W x D (in)	29.75" H x 19.75" W x 17" D
Weight	305 Lbs.
Shelves	2
Capacity	5.78 cubic feet

All specifications are approximate and subject to change without notice.

Available lock options



The Techmaster lock is a state-of-art electronic lock that controls and audits safe access to prevent burglaries and internal theft. The Techmaster features Time delay or open period with cancel feature. Time-Lock any door, 1-4 windows per day. Audit up to 900 entries and 90 users through optional AC powered screen, laptop or online internet connection.



The L02 lock offers unrivaled value in electronic safe access. The L02 offers a time delay mode which can be set from 1 to 99 minutes. When enabled, one master code, two manager codes and 28 users codes are available with full supervisory control and code management. The lock offers a dual control mode for added security to require two combinations. It allows an armored car service to bypass time delay. The L02 utilizes external A/C power for unlimited use with battery power backup. The L02 features an LCD display for ease of use and can store an audit trail of up to 200 events.

Dallas

3140 Towerwood Drive
Dallas, Texas 75234
Tel. 972.243.3711
Toll. 800.225.2984

www.RollandSolutions.com